

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.04.13

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1600V/1Min.

IEC Standard





1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	250V	160V
Rate current(A)	7A		

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=02~24P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	□
To	Over	To	Over	To	Over	To	Over	0.1/10	<	
6	6	10	10	30	30	60	60			
	10	24	24	60	60	100	100			
		30	30	100	100	150	150			
				±0.30	±0.50	±0.70	±1.00	±1.30	±2'	


5. RoHS Compliance

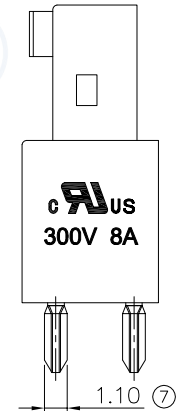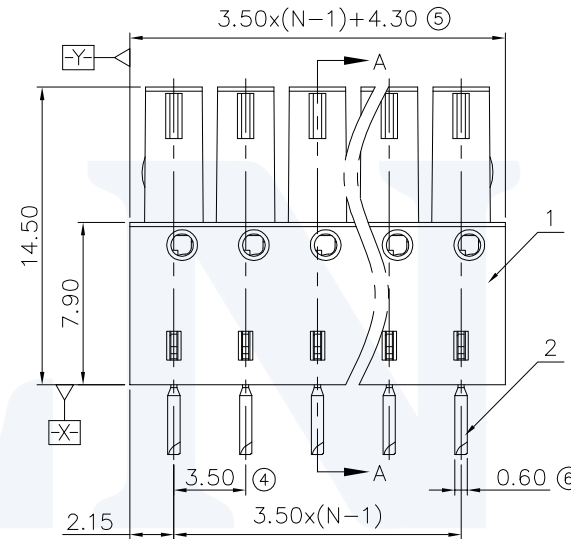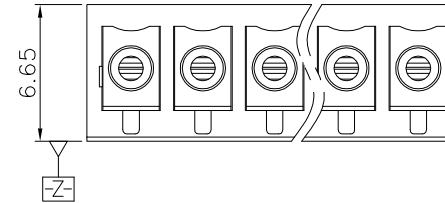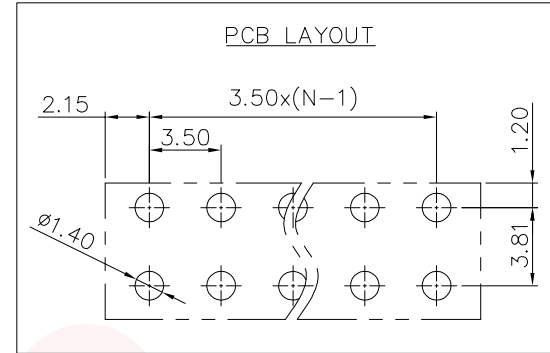

Ordering Information

JL15EDGB - 350 XX G 0 1

Pitch 350=3.50PH
No. of pins 2P, 3P, 4P~24P
Housing Color B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, □=Orange, E=Grey
Packing 0=Pe bag, T=Tube, A=Tray

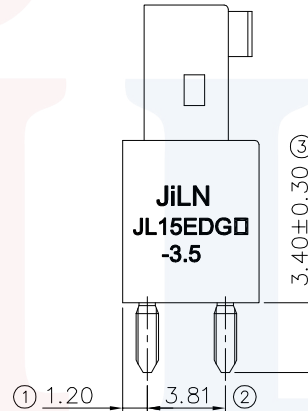

DRAW	SHUANGPING ZHENG	SCALE	FIT	东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAD LIU	SIZE	A4		
		SHEET	1/1		
APPROVE	YONGLIANG GAO	PROJ.		PART NO.	JL15EDGB-350XXG01
ITEM	NAME OF PART	MATERIAL	NOTES	TITLE:	JL15EDGB-3.50-XXP 插拔式母座 / 直脚 / 绿色

2	Clamp	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES