

SPECIFICATIONS

Rated(额定参数): 150V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):26~16AWG
 Strip length(剥线长度):10mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s
 IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	160V	160V
Rate current(A)	8A		

Housing Material(塑件): PA66 (UL94 V-0)
 Reed(弹片): Stainless steel (不锈钢)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Button(手柄): POM, Color:Orange
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	150
6	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information






JL15EDGKNHM - 350 XX G 0 1

Pitch
350=3.5PH

No. of pins
4P~48P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Pe bag
 A=Tray

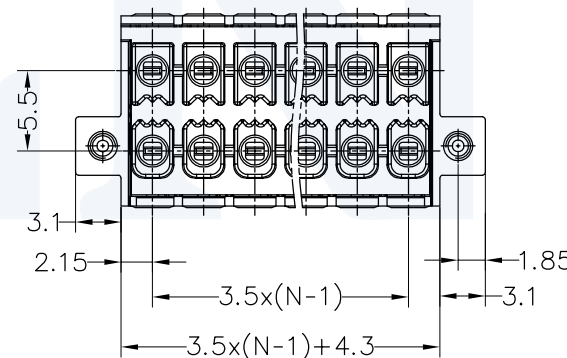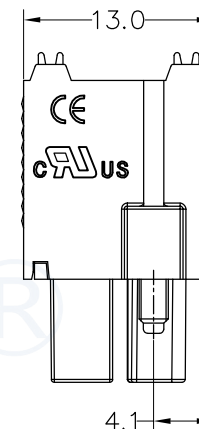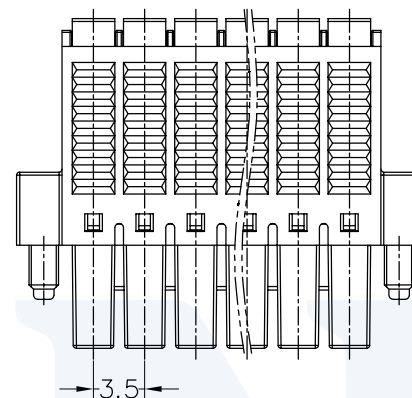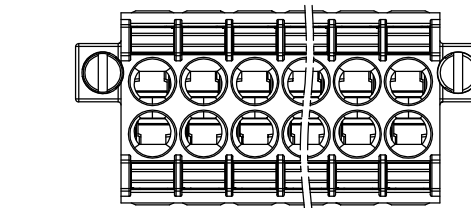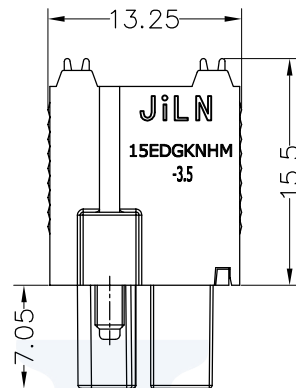

DRAW	SHUANGPING ZHENG	SCALE	FIT	东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO.	JL15EDGKNHM-350XXG01
		SHEET	1/1	TITLE:	JL15EDGKNHM-3.5-2XNP插拔式母座/绿色/带耳
APPROVE	YONGLIANG GAO	PROJ.			