

SPECIFICATIONS

Rated(额定参数): 300V,8A

Dielectric strength(抗电强度): AC1500V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Wire Range(线径):26~16AWG

Strip length(剥线长度):10mm

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	160V	160V
Rate current(A)	8A		

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)

Reed(弹片): Stainless steel (不锈钢)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
T0	OVER 6	OVER 10	T0	OVER 30	OVER 60	OVER 100	OVER 150
6	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information






JL15EDGKNHG - 350 XX B 0 1

Pitch
350=3.5PH

No.of pins
4P~48P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
A=Tray

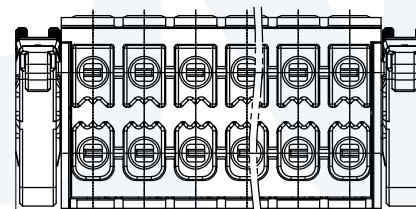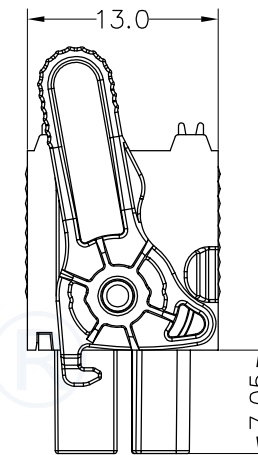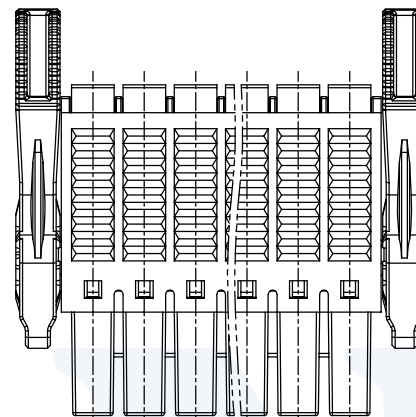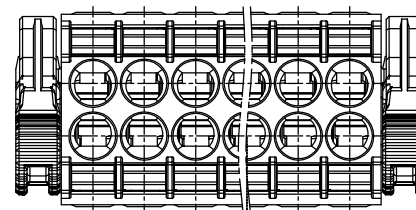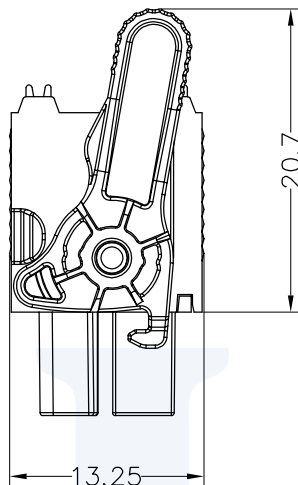

DRAW	SHUANGPING ZHENG	SCALE	FIT	东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO.	JL15EDGKNHG-350XXB01
		SHEET	1/1	TITLE:	JL15EDGKNHG-3.5-2XNP插拔式母座/黑色/带锁钩
APPROVE	YONGLIANG GAO	PROJ.			