

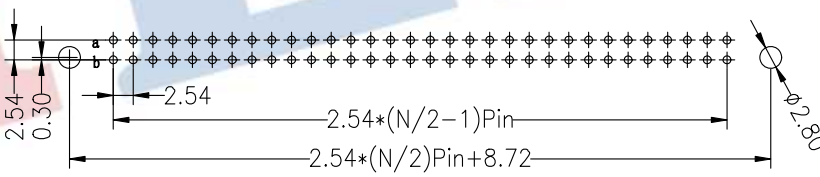
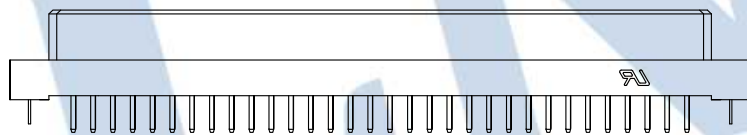


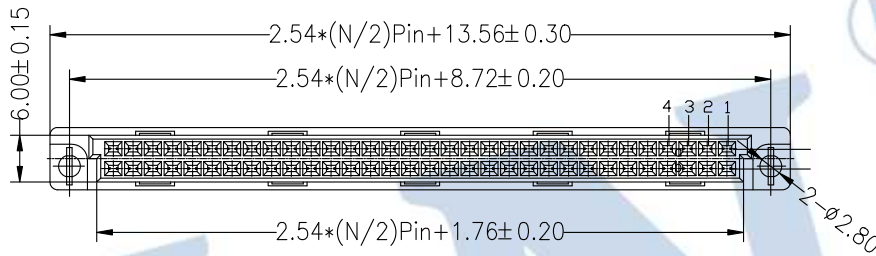

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C, 10s(PBT insulator)

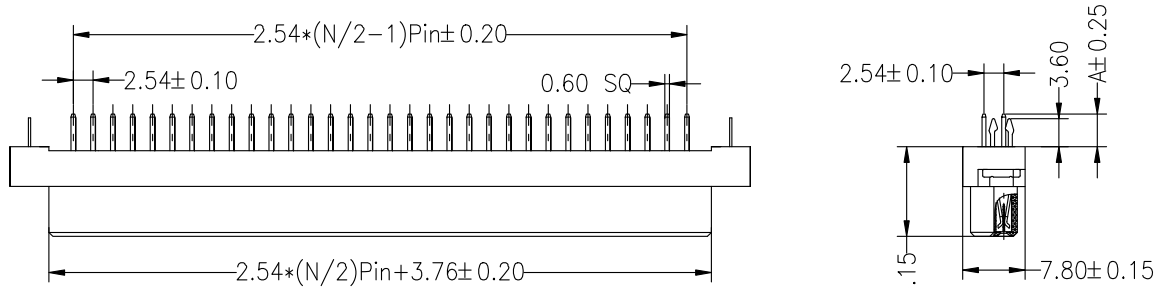

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

**Ordering Information**

**3511 2 XX B M S XX B W A X**

No.of Pins NPin N=10、16、20、 32、44、48、64	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
--	------------------------	---	-------------

				OPERATION		DRAW	YiYuSheng	15.04.06	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 35112XXBFSXXBWAX		
				X.XXX	±0.10		SHEET	1/1				
A0	2015.04.06	NEW DRAWING		Angle	±3°	APPROVE		PROJ.		TITLE:	欧式插座 公座 180度 2xNPIN 带鱼叉成品系列图	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							