
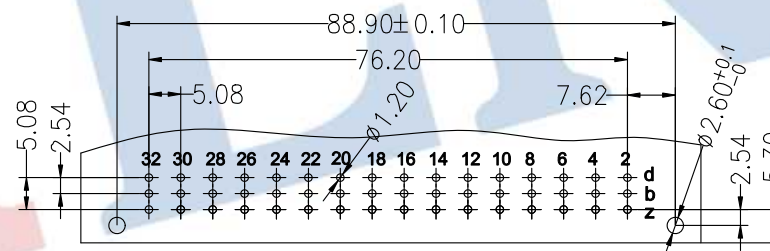
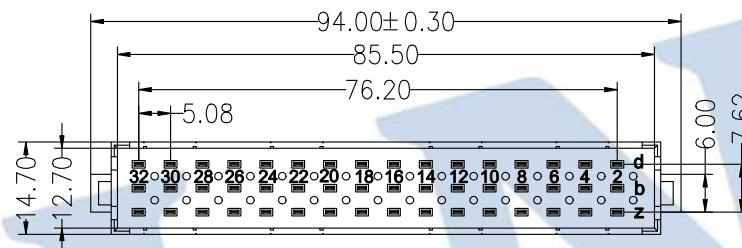
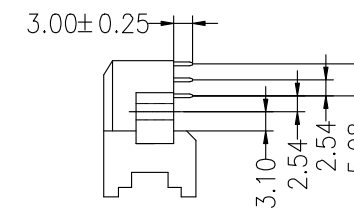


HSF RoHS

SPECIFICATIONS

Current rating: 5.6 Amps .
 Contact resistance: 20 mohms initial
 Insulation resistance: 100000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C

Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245° C±5° C, 10s(PBT insulator)

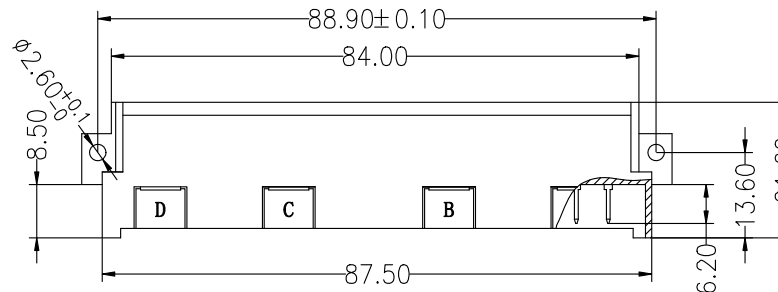

Ordering Information

35133 48 A M R XX B N A X

No. of Pins: 48PIN
 Contact Type: M= male
 Contact Plating:
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN: Tin
 Stream Code

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	YiYuSheng	15.04.03	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
A0	2015.04.03	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	PART NO.	3513348AMRXXBNAX
REV	DATE	MODIFICATION DESCRIPTION		Angle	±3°				PROJ.	◆	TITLE:	DIN 41612 of 5.08mm pAitch large current 90° Male 348
			CHANGE	DIM	TOL							