
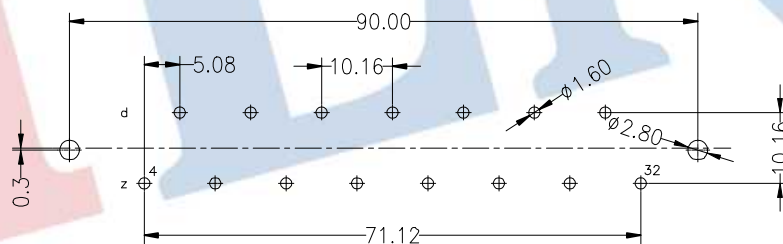
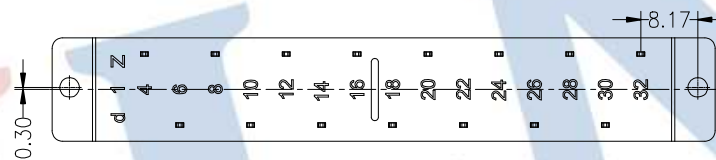

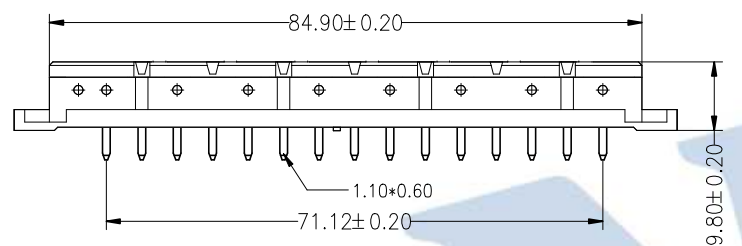


HSF RoHS

SPECIFICATIONS

Current rating: 15Amp .
 Contact resistance: 20mΩ
 Insulation resistance: 1000MΩ min. at 500V DC
 Dielectric withstanding voltage: 3100V AC for 1 minute
 Operating temperature: -55°C to +125°C

Contact Material: Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 245°C±5°C for 5 second

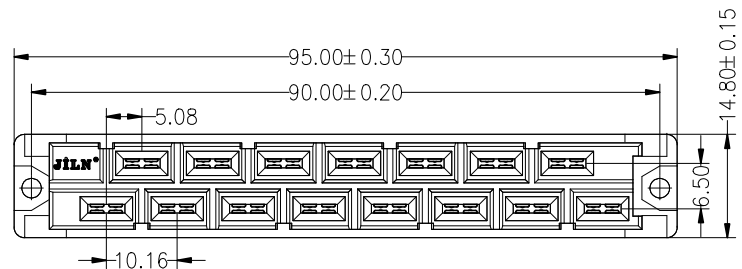

PCB LAYOUT(RECOMMENDED)
 (TOP VIEW TOL. :±0.05)

Ordering Information

3512 2 15 B F S XX BN 01

No.of Pins
15PIN

Contact Type
F=Female

Contact Plating
S0:Gold flash/Tin
SN:Tin

OPERATION		DRAW	Jelly Feng	2023.03.30	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel : 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3512215BFSXXBN01

TITLE: DIN 41612 H15 Type Female

A0	2023.03.30	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE